

Basic-Line Lift

Item No.: TW 242 E

230 V

Autom.

4200 kg



TW 242 E << 2-Post-lift

Description

The Basic Line lift in electromagnetic version 4200 kg load capacity.

With automatic unlockable safety latches, adjustable lifting pads, high-quality Powder coating and flat bridge plate (only 35 mm). With the electromagnetic Basic Line you can lift everything from Smart to vans.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Automatic safety-lock release
- Rotary lifting plates with thread protection
- Emergency lowering in case of power cut
- High quality special profile supporting posts
- 2 Hydraulic cylinders for powerful lifting and lowering
- Automatic arm-locking system
- Quality powder coating
- Steel cable synchronization
- Extra flat telescopic lifting arms for sport cars

Delivery contents

- Lift incl. Power unit
- Heavy duty anchor bolts (10 pcs.)
- Rubber door protectors
- CE-Certificate
- English instruction manual | Examination book
- Product video online
- Assembly video online



Note try our technical decision helper (on page 6) before buying your 2-post lift(s)!




Product video



Assembly video



optionally available:





Column chain guard



Transporter adapters (4 pcs.)
See page 31!




Details

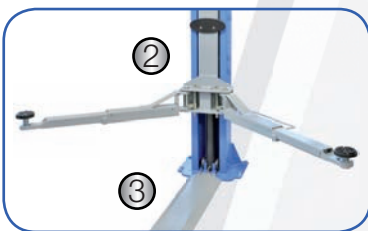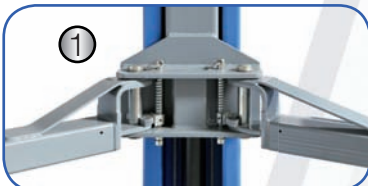


- (1) Automatic arm-locking system
- (2) Asymmetric lifting-arms
- (3) 35 mm high floor plate
- (4) Powerful E-Motor
- (5) IP 54 Electric-box
- (6) Door protector
- (7) Height-adjustable lifting pads
- (8) Low lifting point: 96 mm

Dimensions and technical data | The optional base plate reinforcement

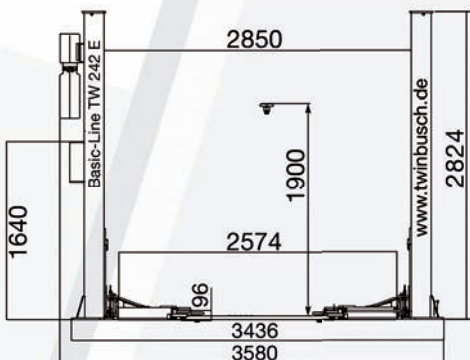

If space is a problem, the lift can also be constructed narrower than the specified total width! How it works? Contact us!

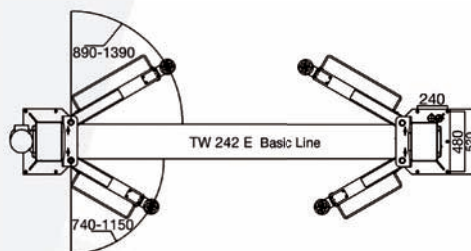

Through experience the required concrete depth (foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 31 a special solution, which can be used with a concrete thickness of 150 mm to 200 mm.

Technical Data: TW 242 E	
Lifting capacity	4200 kg
Lifting height max.	1900 mm/Ad 2050
Lowest lifting point	96 mm
Lifting, lowering time (approx.)	45/30 sec.
Power supply	230 V
Motor power	2,2 kW
Fusing	16 A / type C
Weight (approx.)	600 kg