



ERCO C632 EF
ERCO C636 EF

C-Line

Lifting equipment



3200

3600



Electrohydraulic underbody double scissors type lift,
for tyre specialists, car workshops, and body repairers



ERCO C636 EF - ERCO C632 EF

Electrohydraulic underbody double scissors type lift, for tyre specialists, car workshops, and body repairers.

Alignment of the runways with a dual **MASTER/SLAVE** circuit (**two cylinders per runboard**) without mechanical safety racks. Runboards version with extensions or flaps (F).

All models available in both on-floor and flush installation versions.



- Unique arm geometry for maximum stiffness and minimised space usage.
- Special **lift linkage**, for lifting loads even from the lowest lift height.



- **Runways with suspended flaps** which also act as vehicle access ramps.



- **Adjustment bolts** with rubber to cushion the end of the stroke.



- **Generously sized, self-lubricating sliding blocks.**

SUPPLIED ACCESSORIES

- Self-lubricating bushings on all rotating parts
- Set of 4 rubber pads

OPTIONAL

- Pair of cross pieces and pads for off-road vehicles
- Kit for pit installations


TECHNICAL DATA

Model	Lift capacity	Lifting time	Three phase motor	Single phase motor	Max. lifting height	Lift min. height
ERCO C632 EF	3200 kg	45 s	230/400V - 3kW	230V - 3kW	2040 mm	105 mm
ERCO C636 EF	3600 kg		3Ph - 50/60Hz	1Ph - 50/60Hz		110 mm

ERCO C632 EF

OVERALL DIMENSIONS

ERCO C636 EF

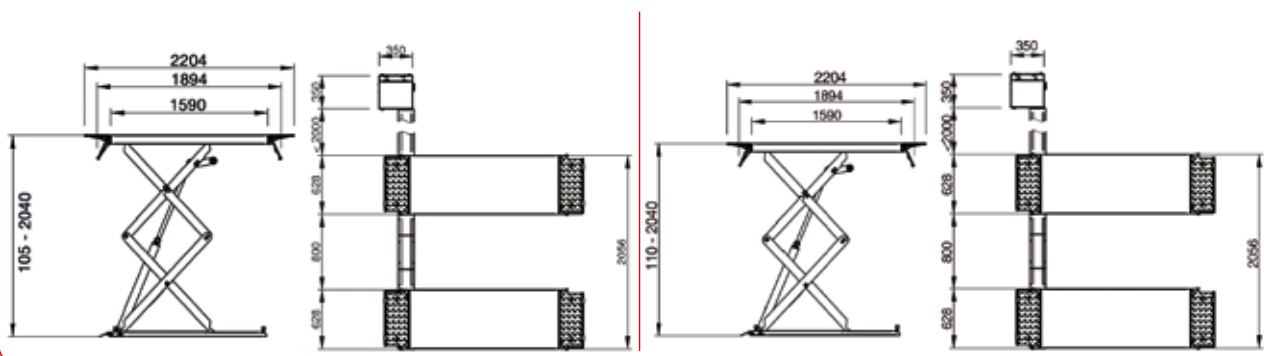

NEXION SPA - www.corghi.com - info@corghi.com

Designed in
ITALY

